

## Unique Software Capabilities




CCM has been creating unique design and analysis software solutions for composite structures for more than two decades. The software is continuously upgraded to reflect new research findings as well as to capitalize on advances in computing technology. Software applications such as SMARTree, LIMS and MAT162 are used extensively by researchers at UD-CCM and industrial sponsors to predict material properties and behavior during processing as well as study failure of composites under dynamic loading.

### SMARTree

SMARTree is an easy to use drag and build GUI with built in solvers that allows implementation and control of standard protocols to store and share material, process and test data. The PC client manages creation and storage of XML data with built-in data and logic checking that validates the information while being assembled. The software utilizes 'SMART Tags' similar to hashtag metadata that reference stored tree data for embedded modeling and design functionality. The client can also directly import raw test data and images so that the user not only has access to summary data but also the source material that derived this information. Some features of the software include:

- Easy to use drag and drop GUI that allows implementation and control of standard protocols to store and share material, process and test data.
- Built in hierarchical logic and integrity checks so as to ensure valid data with compliance to various material and test standards.
- Embedded solvers for micromechanics, laminate mechanics and process modeling of composites.
- Data reduction methods capable of handling various data sources including images and test data.
- Real time search of cloud stored SMARTrees.
- Active folder management utility that tracks SMARTree's within cloud folders.
- Users can build active sensor SMARTrees or passive properties, standards and procedure libraries.
- Communicates to external devices using standard NI DAQ protocols for machine process control and feedback.

<http://www.ccm.udel.edu/software/smartree-software/>

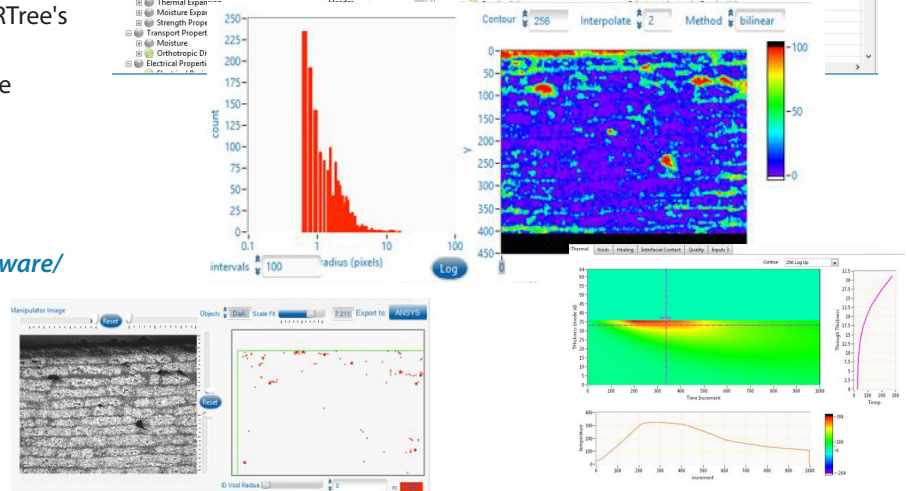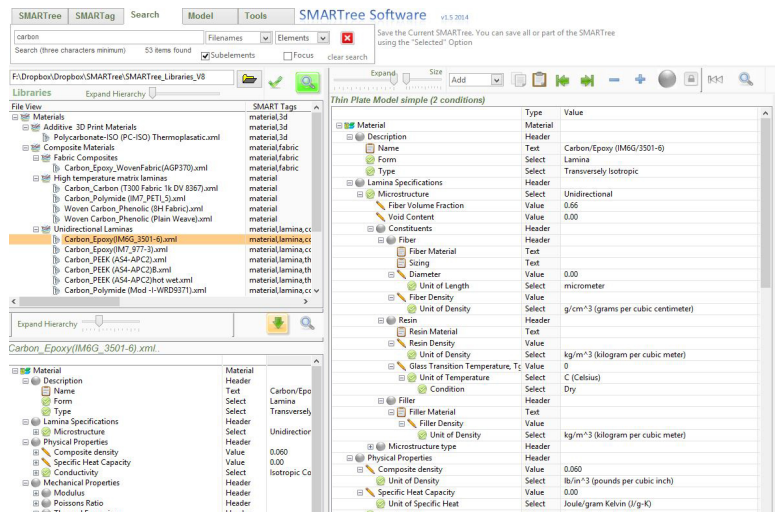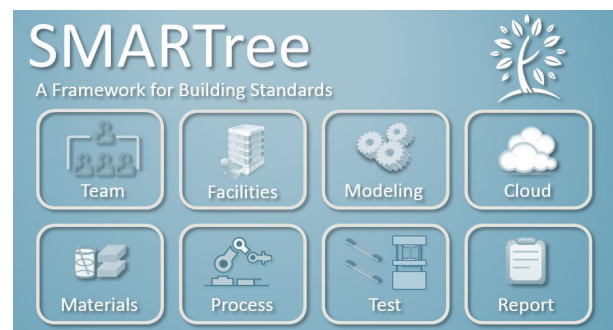

### Technical Contacts:



CDS: John Tierney, Ph.D. | 302.831.0548 | [jtierney@udel.edu](mailto:jtierney@udel.edu) • LIMS: Pavel Simacek, Ph.D. | 302.831.6454 | [psimacek@udel.edu](mailto:psimacek@udel.edu)  
 MAT162: Bazle Haque, Ph.D. | 302.831.6805 | [gama@udel.edu](mailto:gama@udel.edu)

## Liquid Injection Molding Simulation (LIMS)

Liquid Injection Molding Simulation (LIMS) is a software tool that simulates the mold filling stage of resin transfer molding (RTM) and related processes. LIMS has been successfully used to design and simulate intelligent or adaptive filling processes that utilize sensors mounted on the part and controllable injection hardware, either as a stand-alone program or as a simulation engine for other programs.

- Fast solution algorithm
- 3D Solids, 2.5D shells, & 1D runners
- Multiple injection gates, vents, and sensors
- Fabric deformation can be integrated
- Fully adoptable and controllable using script language
- Dry spot prediction is available
- Dynamic link libraries are provided for other programs to run and control LIMS simulation and exchange data with the simulation in efficient manner
- Graphical user interface is tailored toward the specific needs of liquid composite molding is included.
- Input files can be prepared in many applications.

<http://sites.udel.edu/lims/>

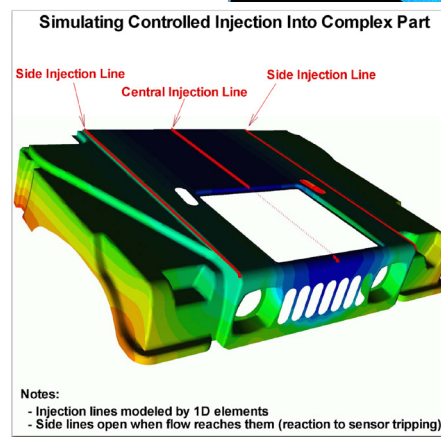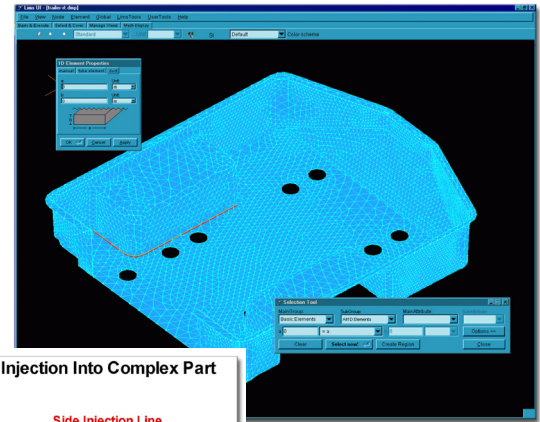


## MAT162 in LS-DYNA: Progressive Damage Modeling of Composites

MAT162, a material model developed by Materials Sciences Corporation (MSC), is the state-of-the-art in three dimensional progressive damage modeling of unidirectional (UD) and plain weave (PW) composites using solid elements in LS-Dyna 971, suitable for modeling composites under dynamic impact, penetration, and blast loading. UD-CCM is the technical support for this material model.

- Quadratic Failure Criteria with a new Delamination Model
- Rate-Dependent Progressive Damage
- Tension-Shear Damage Mode allows modeling Perforation
- Punch-Shear and Crush Damage Modes allow Modeling Penetration
- Impact up to 1.5 km/s and blast damage can be modeled

<http://www.ccm.udel.edu/software/mat162/>

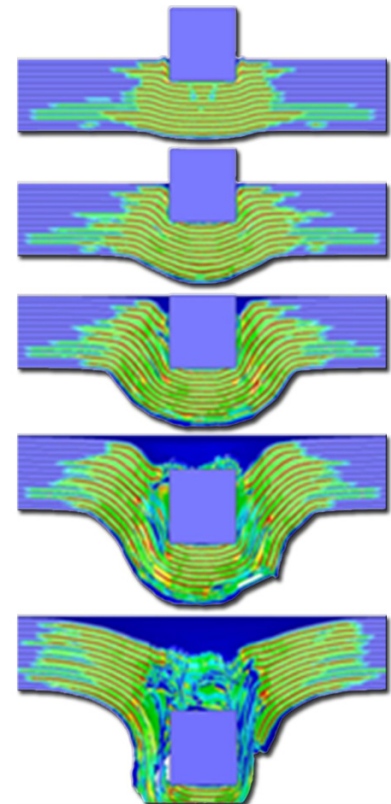

### Technical Contacts: